

INDEPENDENT

# BATTERY CERTIFICATE



CERTIFICATE NUMBER: 7B580296-2DF6-4EFF-8389-2AF2FA9D5630

VEHICLE

BRAND: Tesla  
MODEL: Model 3 - 82,1 kWh

MILEAGE: 172,562 km  
VIN: 5YJ3E7EC1MF843870

EXECUTED BY: AAA Auto

DATE AND TIME:  
08.01.2026, 10:59:00

RESULTS

## STATE OF HEALTH (SOH)

89.7 %

ENERGY

70kWh | 78kWh




WLTP RANGE

551km | 614km

RATING

## BENCHMARKING

How does your vehicle compare to comparable vehicles?

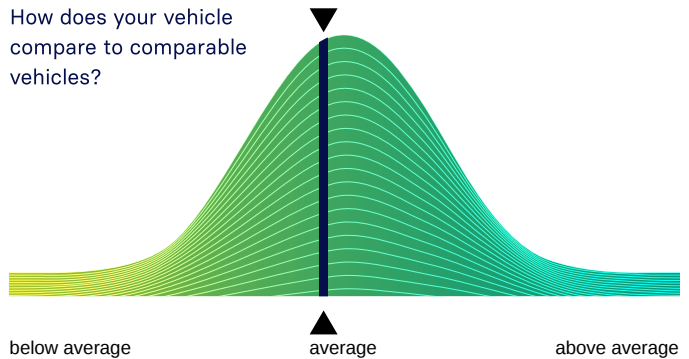

CHECKS

- Battery Management System (BMS) ✓
- Battery Sensor ✓
- Battery Measurements ✓
- Battery Cell Voltages ✓
- Vehicle Communication ✓



EVALUATION

## GOOD HEALTH - NO ABNORMALITIES DETECTED

Based on the detailed battery diagnostics performed with the AVILOO FLASH Test, we hereby certify that the drive battery of this vehicle is in good condition.

The drive battery is therefore officially AVILOO Certified.

*Marcus Berger*

Dr. Marcus Berger, CEO



**ENERGY**

	Gross	Net (Nominal)	Usable
Current:	73.6kWh	69.8kWh	65.6kWh
New:	82.1kWh	77.9kWh	73.2kWh

**RANGE**

	WLTP	Typical	Individual
Current:	490-551km	392km	331km
New:	547-614km	438km	369km

**EXECUTION PROTOCOL**

<b>AVILOO Box connected.</b>	<b>10:58:56</b>
FLASH Test started.	✓
Vehicle detected.	✓
Starting data acquisition.	✓
Finished data acquisition.	✓
Analyzing data.	✓
Analysis completed.	✓

**SENSORS**

Voltage Sensor	✓
Current Sensor	✓
Temperature Sensors	✓
Cell Voltage Sensors	✓

**BMS**


	Value	Status
BMS State of Charge (SoC)*:	28%	
SoC calculation accuracy:		✓
BMS State of Health (SoH)*:	82%	
SoH calculation accuracy:		✓

**MEASUREMENTS**

	Min	Max	Delta	Status
Battery Temperature	-6.0°C	-5.0°C	1.0°C	✓
Cell Voltage	3.568V	3.594V	26mV	✓
Pack Voltage	343.5V			
Average Current	-19.1A			

**CELL VOLTAGES DIAGRAM**

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
1 - 20	3.579	3.581	3.577	3.581	3.579	3.581	3.580	3.582	3.583	3.583	3.584	3.582	3.582	3.582	3.585	3.583	3.584	3.584	3.584	3.585
21 - 40	3.589	3.587	3.589	3.580	3.580	3.580	3.578	3.578	3.578	3.575	3.574	3.575	3.568	3.576	3.574	3.575	3.573	3.574	3.572	3.574
41 - 60	3.575	3.573	3.573	3.573	3.571	3.576	3.575	3.576	3.581	3.577	3.577	3.579	3.578	3.578	3.577	3.578	3.576	3.579	3.579	3.579
61 - 80	3.576	3.577	3.578	3.581	3.576	3.579	3.577	3.578	3.579	3.578	3.581	3.582	3.585	3.594	3.593	3.591	3.588	3.587	3.590	3.588
81 - 96	3.587	3.588	3.586	3.583	3.585	3.587	3.586	3.583	3.586	3.589	3.585	3.582	3.584	3.589	3.586	3.585	/	/	/	/

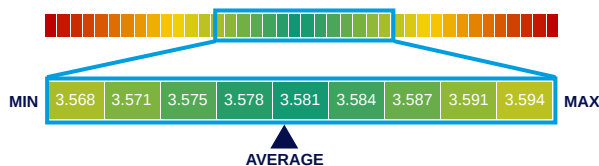

\*The values shown here were not calculated by AVILOO but correspond to the values read out from the battery management system (BMS) and were calculated by the manufacturer. AVILOO therefore assumes no liability for their accuracy.

**DISCLAIMER:** The test result includes the currently calculated state of health (SoH) of the drive battery. The determination is based on data provided by the vehicle. These are evaluated by AVILOO's algorithms using statistical and analytical models. Manipulation of the data in the control unit leads to an incorrect result. The indicated SoH has a technically induced fluctuation range (deviation) of no more than 3% in at least 95% of reference measurements. It should be noted that this tolerance applies to the SoH determination at the cell level and not to the SoH of the entire battery. This is because the state of charge of individual cells may vary, which can negatively affect the current SoH of the battery. However, this can be compensated by the Battery Management System (BMS) or during a calibration. The result reflects the condition of the battery at the time of the test. No conclusions can be drawn about the future state of health of the battery from this. Statements about mechanical damage or external influences are not part of this diagnosis.