

INDEPENDENT BATTERY CERTIFICATE



CERTIFICATE NUMBER: 54E61AC0-FE30-4863-BDCD-C436CE973F17

VEHICLE

BRAND: Tesla
MODEL: Model 3 - 55 kWh

MILEAGE: 99,829 km
VIN: 5YJ3E7EA9MF893009

EXECUTED BY: AAA Auto

DATE AND TIME:
04.02.2026, 15:02:58

RESULTS

STATE OF HEALTH (SOH)

87.4 %

ENERGY

48kWh | 55kWh




WLTP RANGE

385km | 440km

RATING

BENCHMARKING

How does your vehicle compare to comparable vehicles?

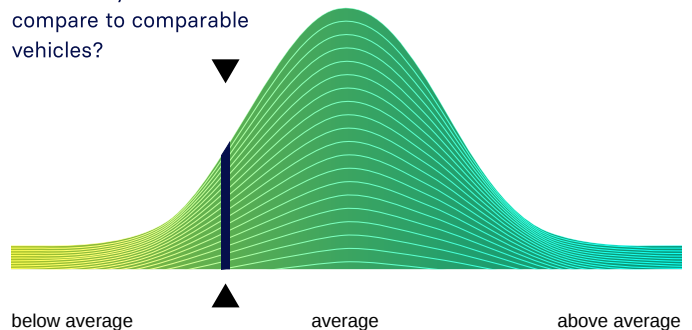

CHECKS

- Battery Management System (BMS) ✓
- Battery Sensor ✓
- Battery Measurements ✓
- Battery Cell Voltages ✓
- Vehicle Communication ✓



EVALUATION

GOOD HEALTH - NO ABNORMALITIES DETECTED

Based on the detailed battery diagnostics performed with the AVILOO FLASH Test, we hereby certify that the drive battery of this vehicle is in good condition.

The drive battery is therefore officially AVILOO Certified.

Dr. Marcus Berger, CEO



ENERGY

	Gross	Net (Nominal)	Usable
Current:	48.1kWh	48.1kWh	45.9kWh
New:	55.0kWh	55.0kWh	52.5kWh

RANGE

	WLTP	Typical	Individual
Current:	385km	292km	297km
New:	440km	334km	340km

EXECUTION PROTOCOL

AVILOO Box connected.	15:02:54
FLASH Test started.	✓
Starting data acquisition.	✓
Vehicle detected.	✓
Finished data acquisition.	✓
Analyzing data.	✓
Analysis completed.	✓

SENSORS

Voltage Sensor	✓
Current Sensor	✓
Temperature Sensors	✓
Cell Voltage Sensors	✓

BMS


	Value	Status
BMS State of Charge (SoC)*:	45%	
SoC calculation accuracy:		✓
BMS State of Health (SoH)*:	82%	
SoH calculation accuracy:		✓

MEASUREMENTS

	Min	Max	Delta	Status
Battery Temperature	5.5°C	6.0°C	0.5°C	✓
Cell Voltage	3.782V	3.788V	6mV	✓
Pack Voltage	363.3V			
Average Current	-7.4A			

CELL VOLTAGES DIAGRAM

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
1 - 20	3.787	3.786	3.787	3.787	3.787	3.786	3.787	3.787	3.787	3.786	3.786	3.786	3.786	3.786	3.786	3.786	3.786	3.786	3.786	3.785
21 - 40	3.785	3.785	3.785	3.785	3.784	3.784	3.784	3.785	3.784	3.785	3.785	3.786	3.786	3.786	3.786	3.786	3.786	3.785	3.786	3.786
41 - 60	3.787	3.787	3.787	3.787	3.786	3.787	3.788	3.787	3.787	3.786	3.787	3.787	3.785	3.786	3.786	3.787	3.787	3.786	3.787	3.786
61 - 80	3.784	3.784	3.784	3.784	3.784	3.784	3.784	3.783	3.784	3.782	3.783	3.784	3.784	3.784	3.784	3.784	3.784	3.785	3.785	3.785
81 - 96	3.786	3.786	3.786	3.786	3.786	3.786	3.786	3.786	3.787	3.786	3.787	3.787	3.787	3.787	3.787	3.786	/	/	/	/

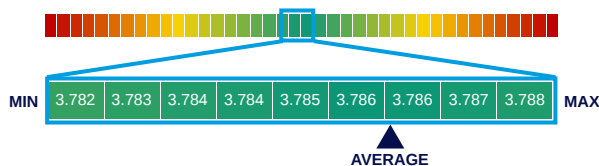

*The values shown here were not calculated by AVILOO but correspond to the values read out from the battery management system (BMS) and were calculated by the manufacturer. AVILOO therefore assumes no liability for their accuracy.

DISCLAIMER: The test result includes the currently calculated state of health (SoH) of the drive battery. The determination is based on data provided by the vehicle. These are evaluated by AVILOO's algorithms using statistical and analytical models. Manipulation of the data in the control unit leads to an incorrect result. The indicated SoH has a technically induced fluctuation range (deviation) of no more than 3% in at least 95% of reference measurements. It should be noted that this tolerance applies to the SoH determination at the cell level and not to the SoH of the entire battery. This is because the state of charge of individual cells may vary, which can negatively affect the current SoH of the battery. However, this can be compensated by the Battery Management System (BMS) or during a calibration. The result reflects the condition of the battery at the time of the test. No conclusions can be drawn about the future state of health of the battery from this. Statements about mechanical damage or external influences are not part of this diagnosis.